

Streams

Announcements

Efficient Sequence Processing


Sequence Operations

Map, filter, and reduce express sequence manipulation using compact expressions

Example: Sum all primes in an interval from **a** (inclusive) to **b** (exclusive)

```
def sum_primes(a, b):  
    total = 0  
    x = a  
    while x < b:  
        if is_prime(x):  
            total = total + x  
        x = x + 1  
    return total
```

```
def sum_primes(a, b):  
    return sum(filter(is_prime, range(a, b)))  
  
sum_primes(1, 6)
```

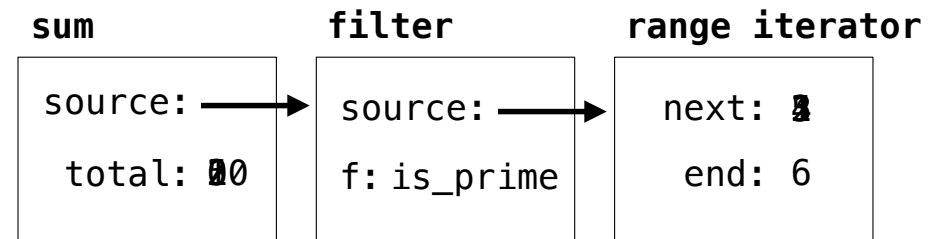

Space:

Constant

Also Constant

(Demo)

Streams

Streams are Lazy Scheme Lists

A stream is a list, but the rest of the list is computed only when needed:

```
(car (cons 1 nil)) -> 1
```

```
(cdr (cons 1 nil)) -> ()
```

```
(cons 1 (cons 2 nil))
```

```
(car (cons-stream 1 nil)) -> 1
```

```
(cdr-stream (cons-stream 1 nil)) -> ()
```

```
(cons-stream 1 (cons-stream 2 nil))
```

Errors only occur when expressions are evaluated:

```
(cons 1 (cons (/ 1 0) nil)) -> ERROR
```

```
(cons-stream 1 (cons-stream (/ 1 0) nil)) -> (1 . #[promise (not forced)])
```

```
(car (cons-stream 1 (cons-stream (/ 1 0) nil))) -> 1
```

```
(cdr-stream (cons-stream 1 (cons-stream (/ 1 0) nil))) -> ERROR
```

(Demo)

Stream Ranges are Implicit

A stream can give on-demand access to each element in order

```
(define (range-stream a b)
  (if (>= a b)
      nil
      (cons-stream a (range-stream (+ a 1) b))))

(define lots (range-stream 1 10000000000000000000))
```

```
scm> (car lots)
1
scm> (car (cdr-stream lots))
2
scm> (car (cdr-stream (cdr-stream lots)))
3
```

Infinite Streams

Integer Stream

An integer stream is a stream of consecutive integers

The rest of the stream is not yet computed when the stream is created

```
(define (int-stream start)
  (cons-stream start (int-stream (+ start 1))))
```

(Demo)

Stream Processing

(Demo)

Recursively Defined Streams


The rest of a constant stream is the constant stream

```
(define ones (cons-stream 1 ones))
```

Combine two streams by separating each into car and cdr

```
(define (add-streams s t)
  (cons-stream (+ (car s) (car t))
               (add-streams (cdr-stream s)
                              (cdr-stream t))))
```

```
(define ints (cons-stream 1 (add-streams ones ints)))
```

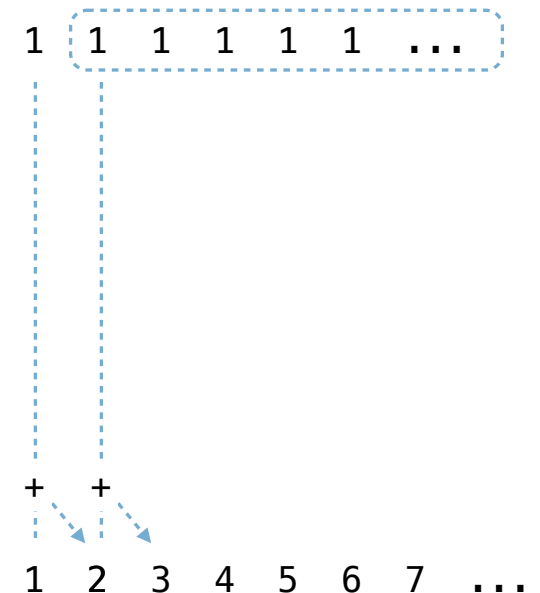

Higher-Order Stream Functions

Higher-Order Functions on Streams

Implementations are identical,
but change cons to cons-stream
and change cdr to cdr-stream

```
(define (map-stream f s)
  (if (null? s)
      nil
      (cons-stream (f (car s))
                    (map-stream f
                                (cdr-stream s)))))
```

```
(define (filter-stream f s)
  (if (null? s)
      nil
      (if (f (car s))
          (cons-stream (car s)
                        (filter-stream f (cdr-stream s)))
          (filter-stream f (cdr-stream s)))))
```

```
(define (reduce-stream f start)
  (if (null? s)
      start
      (reduce-stream f
                     (cdr-stream s)
                     (f start (car s)))))
```

A Stream of Primes

For any prime k , any larger prime must not be divisible by k .


The stream of integers not divisible by any $k \leq n$ is:

The stream of integers not divisible by any $k < n$

Filtered to remove any element divisible by n

This recurrence is called the Sieve of Eratosthenes

2, 3, ~~4~~, 5, ~~6~~, 7, ~~8~~, ~~9~~, ~~10~~, 11, ~~12~~, 13



(Demo)